


CONFIGURATION DE VOTRE BBOX2

- 1) Allez sur la page de configuration de votre BBOX : <http://192.168.1.1>
- 2) Introduisez le mot de passe de la BBOX (voir étiquette derrière)
- 3) Allez dans le menu avancé (Advanced settings) à gauche.

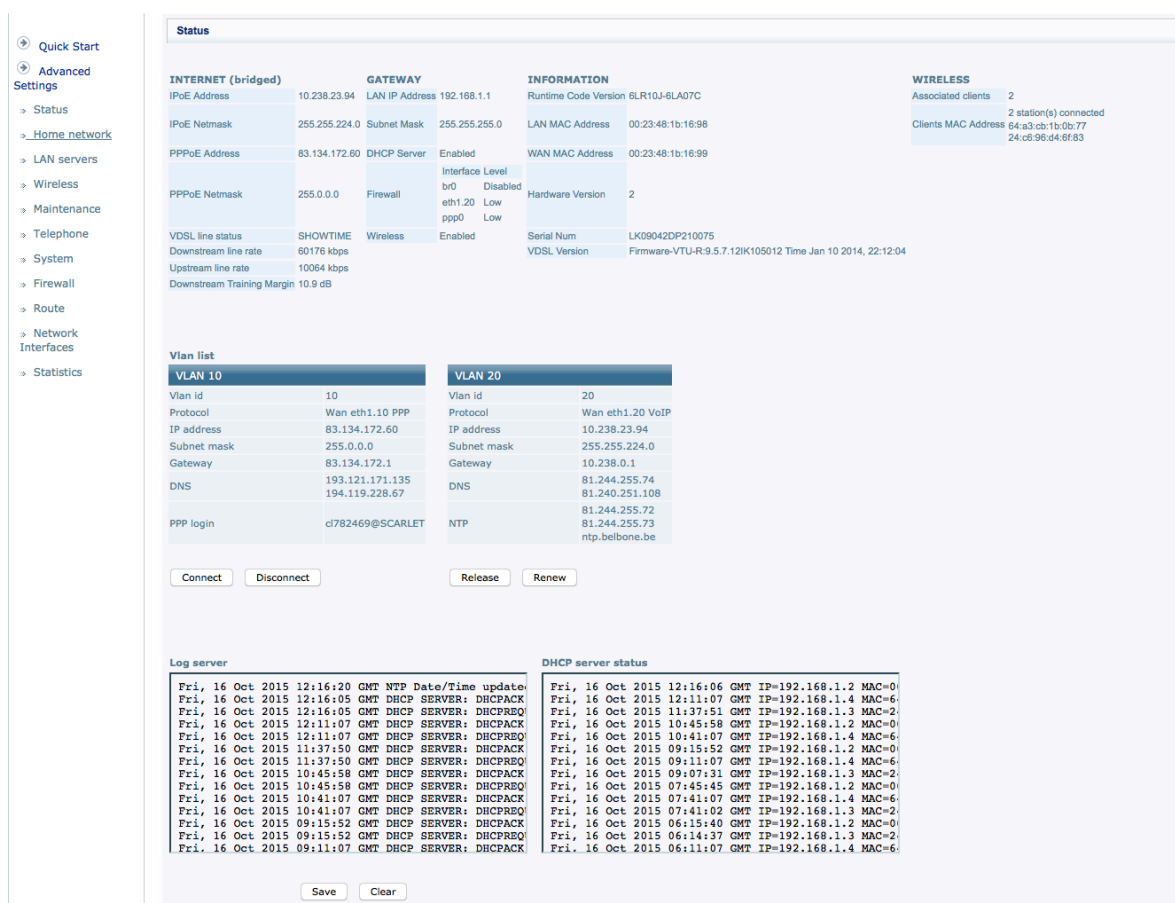


The screenshot shows the configuration page for the BBOX2. On the left is a navigation menu with 'Advanced Settings' selected. The main content area is divided into several sections:

- Status:** A summary of network settings including Internet (bridged), Gateway, Information, and Wireless status.
- Vlan list:** A table showing configurations for VLAN 10 and VLAN 20, including IP address, subnet mask, gateway, and DNS.
- Log server:** A log of DHCP server events, showing timestamps and IP addresses.
- DHCP server status:** A table showing the current status of the DHCP server, including IP address and MAC address.

- 4) Allez dans le menu TELEPHONE

- 5) Dans l'onglet GENERAL changez les paramètres SIP domain – Proxy et Registrar par voip.belgium-voip.com

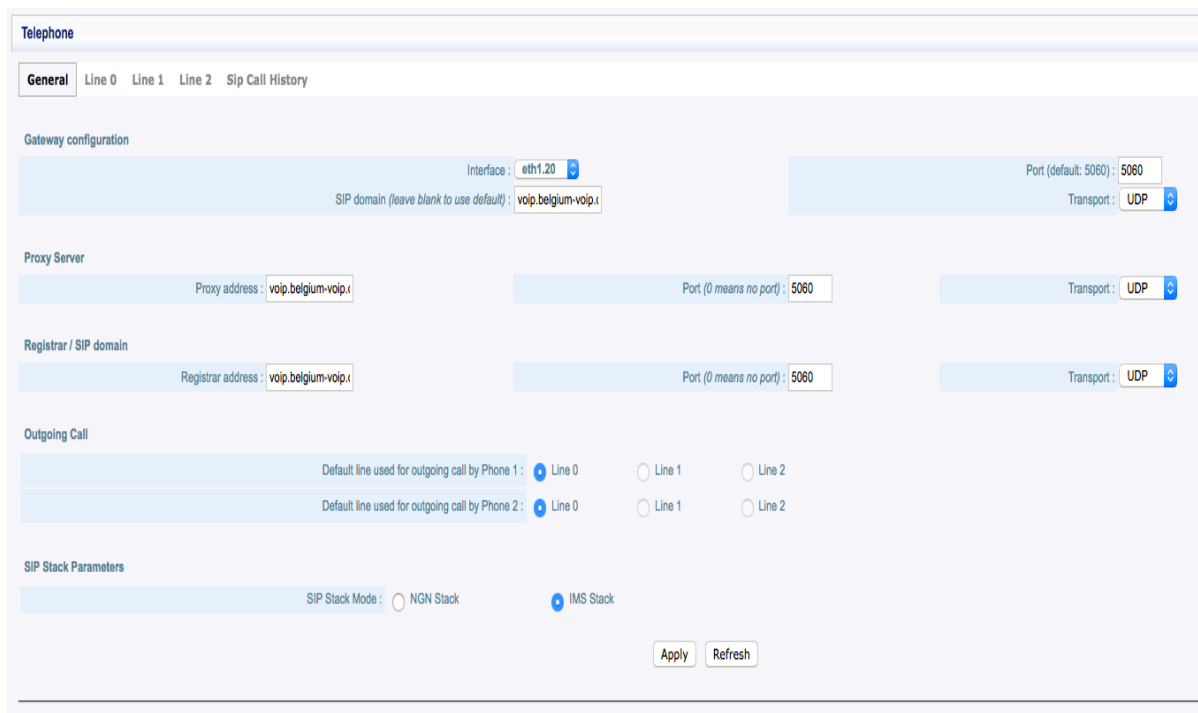

The screenshot shows the 'Telephone' configuration page with the 'General' tab selected. The configuration is organized into several sections:

- Gateway configuration:** Interface is set to 'eth1.20'. SIP domain is 'voip.belgium-voip.x'. Port (default: 5060) is '5060'. Transport is 'UDP'.
- Proxy Server:** Proxy address is 'voip.belgium-voip.x'. Port (0 means no port) is '5060'. Transport is 'UDP'.
- Registrar / SIP domain:** Registrar address is 'voip.belgium-voip.x'. Port (0 means no port) is '5060'. Transport is 'UDP'.
- Outgoing Call:** Default line used for outgoing call by Phone 1 is 'Line 0'. Default line used for outgoing call by Phone 2 is 'Line 0'.
- SIP Stack Parameters:** SIP Stack Mode is set to 'IMS Stack'.

Buttons for 'Apply' and 'Refresh' are located at the bottom right of the configuration area.

Sip domain : voip.belgium-voip.com

Proxy Server : voip.belgium-voip.com

Registrar / SIP domain : voip.belgium-voip.com

Outgoing Call : cochez la bulle à côté de Phone 2 via line 0

Appuyez sur Apply

Ne redémarrez la BBOX que tout à la fin des réglages.

- 6) Allez ensuite dans l'onglet Line 0 et introduisez les paramètres de votre ligne (voir feuille connexion)

- Quick Start
- Advanced Settings
- Status
- Home network
- LAN servers
- Wireless
- Maintenance
- Telephone
- System
- Firewall
- Route
- Network Interfaces
- Statistics

Telephone

General Line 0 Line 1 Line 2 Sip Call History

Line Status

Registration status : **Up** Call status : **Idle**

Line configuration

Telephone number :

URI : sip:+3210730734@ims.scarlet.be

Auth. User Name :

Auth. Password :

Physical Interface Association

Phone 1 : Phone 2 :

Supplementary services

Call Waiting CLIR MWI

TRES IMPORTANT !!!! avant de redémarrer votre BBOX

Allez dans le menu NETWORK Interface et cliquez sur Wan eth1.20 VOIP

Network Interfaces		
Interface Name	Status	Action
LAN Bridge	Connected	
Wan eth1.20 VoIP	Connected	
WAN PPPoE	Connected	

Status



Connection Properties Disable

Name:	Wan eth1.20 VoIP
Device Name:	eth1.20
Status:	Connected
Network:	WAN
Underlying Device:	VLAN Physical Device
Connection Type:	Ethernet
MAC Address:	00:23:48:1b:16:9a
IP Address:	10.238.23.94
Subnet Mask:	255.255.224.0
DNS Server:	81.244.255.74 81.240.251.108
IP Address Distribution:	Disabled
Received Packets:	1890
Sent Packets:	1980
Time Span:	151:59:12

Cliquez sur Settings et changez les paramètres **Internet protocol et Internet Connection Firewall**

Configure Connection

General

Device Name:	eth1.20
Status:	Connected
Schedule:	Always
Network:	WAN
Connection Type:	Ethernet
Physical Address:	00:23:48:1b:16:9a
MTU:	Automatic 1496
Underlying Connection:	VLAN Physical Device

Internet Protocol

Override Subnet Mask:

DHCP Lease:

Expires In: 5883 minutes

DNS Server

Obtain DNS Server Address Automatically

IP Address Distribution

Disabled

Routing

Basic

Enabled

Internet Connection Firewall

Enabled

Additional IP Addresses

New IP Address



Configure Connection

General

Device Name:	eth1.20
Status:	Connected
Schedule:	Always
Network:	WAN
Connection Type:	Ethernet
Physical Address:	00:23:48:1b:16:9a
MTU:	Automatic 1496
Underlying Connection:	VLAN Physical Device
Internet Protocol:	No IP Address
Internet Connection Firewall:	<input type="checkbox"/> Enabled
Additional IP Addresses:	New IP Address

Apply Cancel

Cliquez sur Apply.

Enfin redémarrer votre BBOX.

Si tout est OK les voyant Téléphone de la BBOX 1 et 2 seront allumés et votre ligne est OK.